
## REPAIR SOLUTION FOR COMMERCIAL VEHICLE 商用车维修整体解决方案



YANTAI AUTENF AUTOMOBILE SERVICES CO., LTD. 烟台腾飞工贸有限公司 YANTAI CHINA

### YANTAI AUTENF AUTOMOBILE SERVICES CO., LTD. 烟台腾飞工贸有限公司

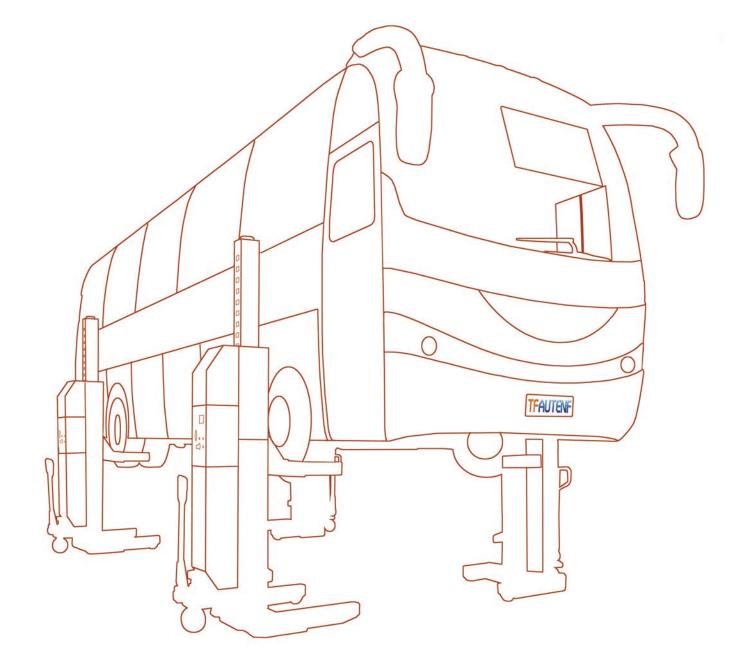

### **TECHNICAL SPECIFICATION**

model	CL-2160	CL-2180	
connection type	cabled	cabled	
column quantity	2	2	
lifting capacity	6000 kg/set	8000 kg/set	
lifting height	0 - 1750 mm	0 - 1750 mm	
fork arm length	784 - 1124 mm	784 -1124 mm	
time of rising/falling	120 s/110 s	120 s/110 s	
working voltage	220 V/380 V	220 V/380 V	
column weight	480 kg	530 kg	
column size	780×530×2450 mm	780×530×2450 mm	
	(fork arm not included)		

### **Features**

◆ Adjustable wheel support for more kinds of wheels;

connection type

column quantity

lifting capacity

lifting height

applicable tire diameter

time of rising/falling

working voltage

charging voltage

column weight

column size

- ◆ Double-safety guaranteed by both hydraulic flow control and mechanical locks;
- ◆ SCM technology guarantees synchronization;
- ◆ LCD screen shows the exact lifting height and fault warnings;
- ◆ Remote control handle with 5meters cable available;
- Recommended for medium size vehicle, e.g. SUV, RV, pickup etc.;



TL-4075

wireless

30000 kg/set

0 - 1650 mm

500 - 1120 mm

120 s/110 s

DC 24 V

110 V/220 V

670 kg

1100×1330×2250 mm

TL-4175

cabled

30000 kg/set

0 - 1650 mm

500-1120 mm

120 s/110 s

220 V/380 V

600 kg

1100×1330×2250 mm

### **Features**

TL-6175

cabled

6

45000 kg/set

0 - 1650 mm

500 -1120 mm

120 s/110 s

220 V/380 V

600 kg

1100×1330×2250 mm

- Master / Slave columns;
- ◆ Operation at each column, up / down / lock;
- With or without cable at your choice;
- ◆ Hydraulic drive, insensitive and nearly maintenance-free.
- ◆ Flattended base frame for vehicles with low ground clearance;
- Adjustable wheel support for more kinds of wheels;
- ◆ Double-safety guaranteed by both hydraulic flow control and mechanical locks;
- SCM technology guarantees synchronization;
- ◆ LCD screen shows the exact lifting height and fault warnings;
- ◆ Movable column makes your work easy and comfortable;
- ◆ Remote control handle with 5meters cable available;
- Hydraulic pallet jack at your choice;
- Lifting beam available;

### **OPTIONAL PARTS**

roduct name	axle stand	
fting capacity	7500 kg/pc	
fting height	1390 - 2040 mm	
tand weight	67 kg/pc	



product name	hydraulic jack		
lifting capacity	25000 kg/pc		
lifting height	680 -1200 mm		
jack weight	83 kg/pc		



TL-6075

wireless

6

45000 kg/set

0 - 1650 mm

500 - 1120 mm

120 s/110 s

DC 24 V

110 V/220 V

670 kg

1100×1330×2250 mm

product name	lifting beam	
lifting capacity	15000 kg/pc	1
beam size	3860×600×300-640 mm	
beam weight	380 kg	



Add: No. 16 Luanjia Rd. Fushan Dist. Yantai China

地址:山东省烟台市福山区銮驾路16号

# **COMMERCIAL VEHICLE LIFT**