


## REPAIR SOLUTION FOR ACCIDENT VEHICLE

### 事故车维修整体解决方案

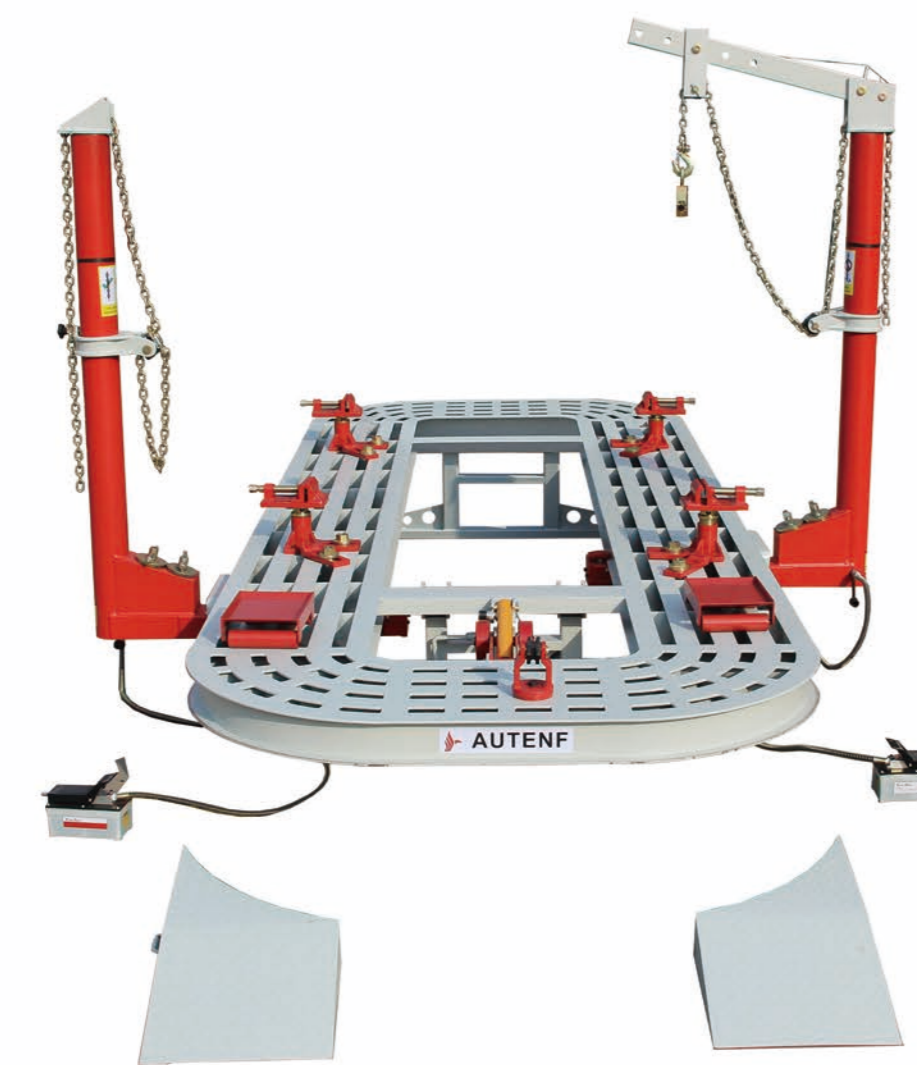


#### Features:

1. Tiltable I-beam platform allows easy drive on and off of any vehicle;
2. Manganese steel corners allow pulling towers move and work more easily;
3. Different combination of different type pulling tower makes work accurately and efficiently;
4. Adopt high quality hydraulic pump, more powerful, but low failure rate;
5. With high strength pulling accessories, it is more easily to recover car distortion;



#### TECHNICAL SPECIFICATION

model	CB-202SP	CB-202LP
power unit	pneumatic-hydraulic	pneumatic-hydraulic
platform material	I-beam	I-beam
platform lifting type	tiltable lifting	tiltable lifting
platform length	5200 mm	5600 mm
platform width	2100 mm	2100 mm
platform ring width	600 mm	600 mm
platform height	550 mm	550 mm
platform lifting capacity	3500 kg	3500 kg
pulling tower quantity	2 pc	2 pc
max. pulling power	10 tons	10 tons
pulling tower working range	360°	360°
hydraulic pressure	70 Mpa	70 Mpa
pneumatic pressure	0.65~0.7 Mpa	0.65~0.7 Mpa
gross weight	2200 kg	2300 kg

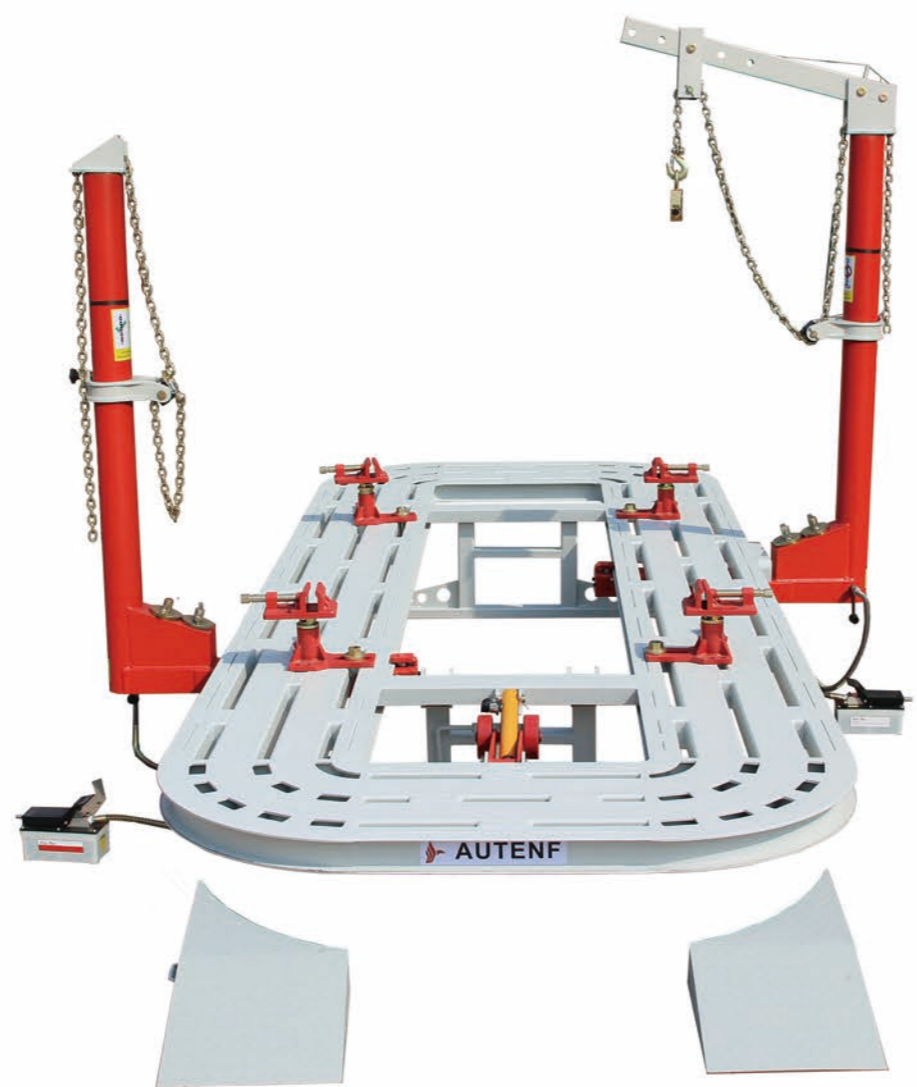


#### Features:

1. Tilttable rectangular tube platform allows easy drive on and off of any vehicle;
2. Manganese steel corners allow pulling towers move and work more easily;
3. Different combination of different type pulling tower makes work accurately and efficiently;
4. Adopt high quality hydraulic pump, more powerful, but low failure rate;
5. With high strength pulling accessories, it is more easily to recover car distortion;



#### TECHNICAL SPECIFICATION

model	CB-302SP	CB-302LP
power unit	pneumatic-hydraulic	pneumatic-hydraulic
platform material	rectangular tube	rectangular tube
platform lifting type	tiltable lifting	tiltable lifting
platform length	5200 mm	5600 mm
platform width	2100 mm	2100 mm
platform ring width	610 mm	610 mm
platform height	550 mm	550 mm
platform lifting capacity	3500 kg	3500 kg
pulling tower quantity	2 pc	2 pc
max. pulling power	10 tons	10 tons
pulling tower working range	360°	360°
hydraulic pressure	70 Mpa	70 Mpa
pneumatic pressure	0.65~0.7 Mpa	0.65~0.7 Mpa
gross weight	2200 kg	2300 kg

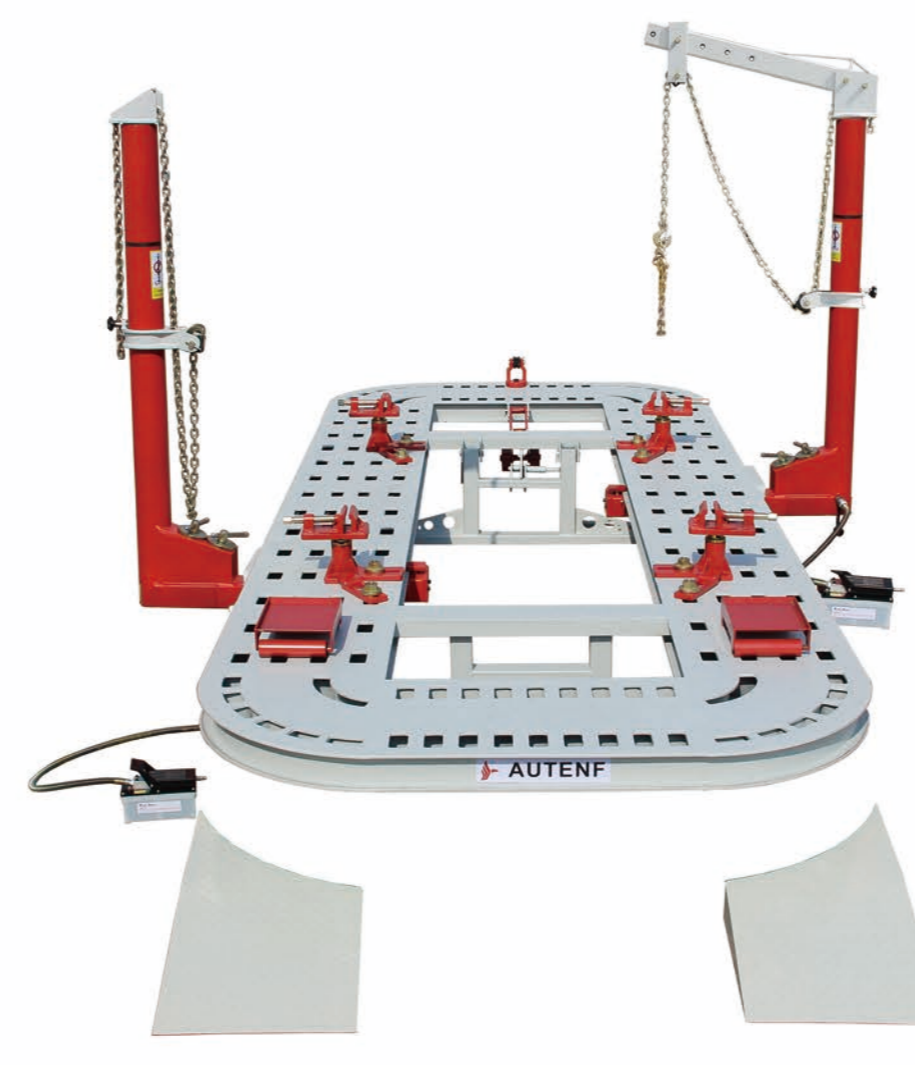

#### Features:

1. Tilttable manganese platform allows easy drive on and off of any vehicle;
2. Manganese steel corners allow pulling towers move and work more easily;
3. Different combination of different type pulling tower makes work accurately and efficiently;
4. Adopt high quality hydraulic pump, more powerful, but low failure rate;
5. With high strength pulling accessories, it is more easily to recover car distortion;



#### TECHNICAL SPECIFICATION

model	CB-502SP	CB-502LP
power unit	pneumatic-hydraulic	pneumatic-hydraulic
platform material	manganese steel	manganese steel
platform lifting type	tiltable lifting	tiltable lifting
platform length	5200 mm	5600 mm
platform width	2200 mm	2200 mm
platform ring width	610 mm	610 mm
platform height	550 mm	550 mm
platform lifting capacity	3500 kg	3500 kg
pulling tower quantity	2 pc	2 pc
max. pulling power	10 tons	10 tons
pulling tower working range	360°	360°
hydraulic pressure	70 Mpa	70 Mpa
pneumatic pressure	0.65~0.7 Mpa	0.65~0.7 Mpa
gross weight	2400 kg	2500 kg



model	AT-8
power unit	pneumatic-hydraulic
platform material	rectangular tube
platform dimension	2300x2000x2100 mm
platform lifting capacity	2000 kg
pulling tower quantity	1 pc
max. pulling power	10 tons
hydraulic pressure	70 Mpa
pneumatic pressure	0.65~0.7 Mpa
gross weight	260 kg

model	AT-9
power unit	pneumatic-hydraulic
platform material	rectangular tube
platform dimension	3550x2100x2000 mm
platform lifting capacity	3500 kg
pulling tower quantity	1 pc
max. pulling power	10 tons
hydraulic pressure	70 Mpa
pneumatic pressure	0.65~0.7 Mpa
gross weight	500 kg

model	AEB2000
power unit	electric-hydraulic
platform material	rectangular tube
platform lifting type	parallel lifting
platform length	3440 mm
platform width	850 mm
platform height	120~1300 mm
platform lifting capacity	2500 kg
pulling tower quantity	1 pc
max. pulling power	5 tons
pulling tower working range	360°
hydraulic pressure	70 Mpa
pneumatic pressure	0.65~0.7 Mpa
gross weight	1400 kg



#### TECHNICAL SPECIFICATION

model	ATB1003
power unit	pneumatic-hydraulic (electric-hydraulic optional)
platform material	H-beam/manganese steel
platform length	9600~14000 mm
platform width	2540/2460 mm
platform ring width	934/750 mm
platform height	600 mm
platform lifting capacity	12000 kg
pulling tower quantity	4~6 pc
max. pulling power	80 tons
pulling tower working range	270°
hydraulic pressure	70 Mpa
pneumatic pressure	0.65~0.7 Mpa

YANTAI AUTENF AUTOMOBILE SERVICES CO., LTD.

烟台腾飞工贸有限公司

YANTAI CHINA